

Zhongtong H13



59 sitting places, 1 standing place



A modern touring coach designed to deliver exceptional comfort for high-capacity passenger travel

MOTOR

 290 or 350 kW

BATTERIES

 365 or 465 kWh

RANGE

 392 or 500 km
SORT 2

CHARGING

 150 kW

TECHNICAL INFORMATION

M3 class II intercity bus

DIMENSIONS AND WEIGHT

Length (mm)	13000
Width (mm)	2550
Height (mm)	3420
Wheelbase (mm)	6900
Permitted GVW (kg)	19500
Entrance door width (mm)	750/750 or 750/1200
Entrance step height from the ground (mm)	Front door 355/320* Middle door 380/320*
Internal height (low-floor area) (mm)	1960

BATTERIES

Battery type	LFP (CATL)
Battery capacity (kWh)	365 (9 packs) or 465 (12 packs)
Nominal voltage (V)	600
DC charging power (kW)	150

HEATING AND AIR CONDITIONING

Interior air conditioning / heating (kW)	30 / 19 (heating pump) or 20 (PTC)
Electric heater (kW) (optional)	18
Diesel / HVO heating system (optional) (kW)	32
	34 litres fuel tank

DRIVELINE

Electric motor	Dana or ELFA
Drivetrain	Direct shaft to rear axle
Electric motor type	Permanent magnet synchronous
Motor power (kW)	290 / 350
Max torque (Nm)	3000 / 3500
Suspension	Full air suspension
Brake system	Full air ABS, ASR, ESP, EBS dual circuit (Knorr)
Parking brake	Air actuated, operating on rear axle
Max speed (km/h)	100
Energy consumption (kWh/100 km) SORT 1 / SORT 2 / SORT 3	79
Range (km) SORT 1 / SORT 2 / SORT 3	392 or 500

WARRANTY


Battery	10 year 1.000.000 km**
Base vehicle	2 year 200.000.00 km

*with kneeling

**with minimum 70% retention of Battery capacity over the warranty period



SEATING LAYOUT

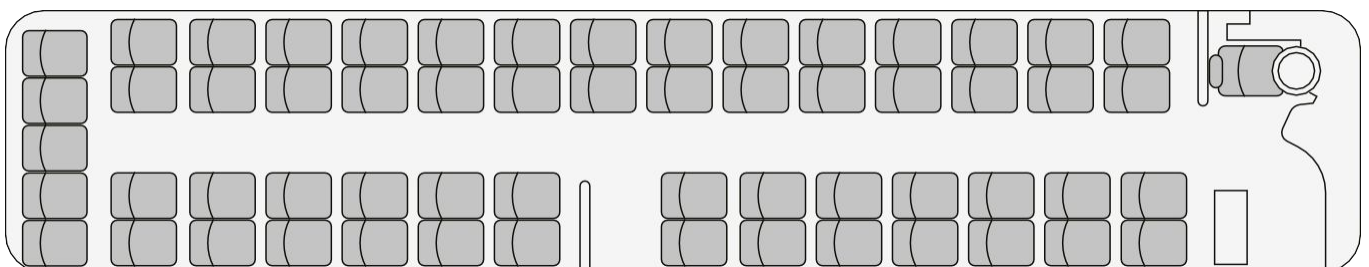

Seats	Flap seats	Standing places	Wheelchair places	Total
59	0	1	0	60



ALTAS AUTO
Centrine str. 30 Pikutiskes,
LT-14300 LITHUANIA

info@altasauto.com
www.altasauto.com

